



ProXL

A solid colored, dual layer, marble accent rubber flooring tile. ProXL's slip-resistant, textured top wear layer provides a non-porous, safe and resilient floor finish. ProXL is a great fit for weight rooms, ice rinks, fitness centers or home gyms.



Custom logo cutting available

Technical Specifications


Hardness Shore A	ASTM D2240	80
Co-efficient of Friction	ASTM D2047	1.1
Critical Radiant Flux	ASTM E648-03, NFPA253	0.54 watts/cm ² Class I
Static Load Limit	ASTM F970-00	Passes
Optical Density of Smoke	ASTM E662	< 450 Class I
Resistance to Heat	ASTM F-1514	Good
Resistance to Chemicals	ASTM F-925	Good
Wear Layer Thickness	ASTM F-140	Passes
Abrasion Resistance	ASTM D-3389	Passes
Dimensional Stability	ASTM F-2199	Passes
Thickness	ASTM F-3868	Passes
Size	ASTM F-2055	Passes
Squareness	ASTM F-2055	Passes
Quality of Cut	ASTM F-511	Passes
VOC Compliance	ASTM D5116	Yes
Color Stability		Good
Light Reflection		Good
Contributes to LEED Points		Yes
Anti-microbial/Anti-fungal Properties		Yes

Size Specifications

<i>Top wear layer available in various thicknesses</i>	
Construction:	Dual-layer Vulcanized Rubber
Wear Surface:	Color Virgin Blend Rubber
Base Layer:	55% Recycled Rubber

Thickness	Dimension	Weight	Area	Interlock	Weight	Area
6mm	1m x 1m	21 lbs.	10.75 sq. ft.	0.945 m x 0.945 m	18.5 lbs.	9.6 sq.ft.
8mm	1m x 1m	28.4 lbs.	10.75 sq. ft.	0.945 m x 0.945 m	24.7 lbs.	9.6 sq.ft.
10mm	1m x 1m	34.5 lbs.	10.75 sq. ft.	0.945 m x 0.945 m	30.9 lbs.	9.6 sq.ft.

Standard Colors

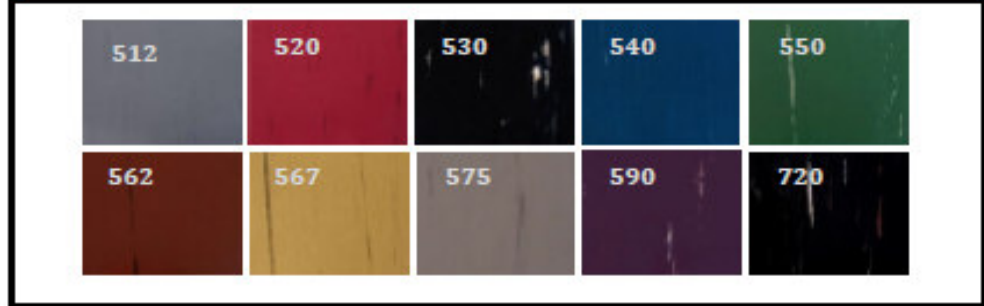

Colors: 512 Mid Grey/Black 520 Red/Black 530 Black/Tan 540 Dark Blue/Tan 550 Green/Tan 562 Espresso/Black 567 Sand/Chocolate 575 Putty/Chocolate 590 Plum/Tan 720 Black/Earth

Colors will be matched to within ± one tone on the pantone chart

Finishes: Matte or Gloss