




1" FIT-TILE™




MYSTIC



GREYHOUND



CAYENNE



CASCADE



BLACK




DENIM



ASTORIA FOG



ADOBE



ALPINE MEADOWS



SANDY BEACH


High Performance Sport Flooring

For additional information or product samples please feel free to contact us at 1-800-864-1272 or 503-625-3746 with any questions. We look forward to hearing from you.



1" FIT-TILE™

Athletic Tiles

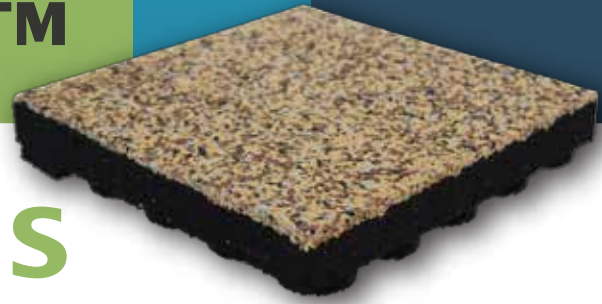

Allied Products, High Performance 1" FIT-TILE™ Sport Flooring transforms any facility from mundane to magnificent. Functional and attractive, FIT-TILE™ provides the optimal combination of durability and versatility; perfect for Schools, Sports Performance Centers, Fitness Centers and Rehabilitation Clinics alike.

Typical Properties

Base:	SBR granular recycled rubber and custom formulated polyurethane binder	
Recycled Content:	100% Recycled Rubber	
Dimensions:	24" x 24" x 1"	
Surface:	Permanently bonded EPDM or SBR recycled rubber	
Support:	324 molded feet	
Locking System:	Mechanical Interlock	
Origin:	Manufactured in McMinnville, Oregon	
Coefficient of Friction:	ASTM C-1028	0.65 dry, 0.63 wet
Water Permeability:		0.27 gal/min/sq/yd.
Lead Content:	ASTM D-4004	nominal 6.0 ppm
Abrasion Resistance:	ASTM D-4060	Wear Index 657 avg. Durability
Tear Strength: Die C	ASTM D-624	118 pli minimum
Tensile:	ASTM D-412	242 psi
Elongation:	ASTM D-412	175%
Weatherization Test:	ASTM C-67 & D-573 There were no signs of failure after completing the freeze-thaw cycle	
Warranty:	10 year limited manufacturer's warranty	

PO Box 1431 • Sherwood, OR 97140
PH: 503-625-3746 • Fax: 503-625-3748
Toll Free: 1-800-864-1272


Allied Products, LLC
Distinctive Flooring & Athletic Surfaces

In California DBA Allied Products Sports Surfacing, Inc.
WWW.ALLIEDPRODUCTSLLC.COM

OR: CCB# 121271 • WA: CCB# ALLIEPL961DT

All Rights Reserved © Allied Products LLC

